


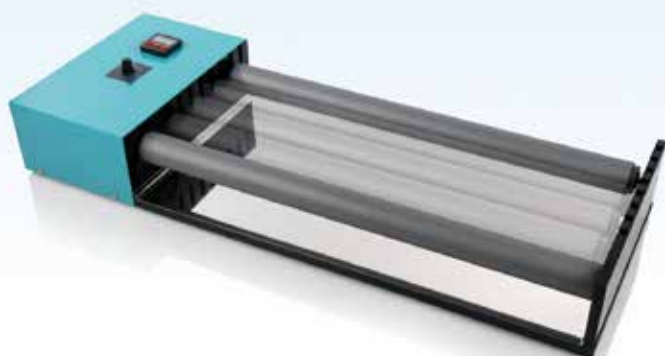

L-209650 Rolling Bench

650 mm long rolls, with strong motor

TECHNICAL DATA

- Rolling Bench to keep samples in motion.
- One roll is driven. Standard with 2 rolls, 1 fixed and 1 loose.
- roll length 650 mm. Ø 46 mm.
- To order more rolls, Art.nr.65209
- You can easily place maximal 5 rolls on the rolling bench
- Heart to heart distance from 7 mm up to 2150 mm
- Dimensions basic unit (WxDxH) 880x 350 x 130 mm
- With timer and strong motor
- Speed 1-240 rpm
- Weight 11.5 kg
- Art.nr.20965 (230V)

• Number of rolling positions	1 up to 4
• Rolling quantity max	15 kg
• Motor rating input(W)	100 W
• Motor rating output(W)	75 W
• Speed display	analog
• Speed range(rpm)	1 - 240 rpm
• Timer display	digital 1s. up to 99h 59m 59s
• Heat output	-
• Heating rate	-
• Heating temperature range	-
• Heat control	-
• Heat control accuracy	-
• Speed control	analog
• Adjustable safety circuit min	-
• Adjustable safety circuit max	-

• Connection for ext. temperature sensor	-
• Control accuracy with sensor	-
• Temperature constancy in medium	-
• Set-up plate material	steel with PE coated
• Set-up dimensions	7 up to 2150 mm
• Dimensions (W x D x H)	880 x 350 x 130 mm
• Weight(kg)	11.5 kg
• Permissible ambient temperature	5 - 50 °C
• Permissible relative humidity	80%
• Protection class according to DIN EN 60529	IP 42
• RS 232 interface	-
• Analog output	-
• Voltage	220 - 230 V
• Frequency	50/60 Hz
• Power input	150 W

• See also the other models for more options on www.labinco-bv.com



LABINCO B.V.

P.O. BOX 3259 • 4800 DG Breda, The Netherlands
Zinkstraat 64 • 4823 AC Breda, The Netherlands
T 0031(0)76 - 5417582 E info@labinco-bv.com
www.labinco-bv.com